

# 1 Enclosures, terminal boxes, construction site boxes

## 3 Enclosures Exde IIC

### 2 DE1-WH series - Exe box

The flameproof enclosures of the DE8-WH (Exd) series are particularly suited for the installation of controls and distributions.

With the addition of an Exe box, controls (push buttons, lamps, etc) and terminals can be added, guaranteeing a user-friendliness.

The Exd and Exe boxes are connected by means of flameproof bushings (number of conductors and section need to be specified).

- II 2 G Ex e IIC T6/T4 Gb
- II 2 G Ex d e IIC T6/T4 Gb
- II 2 G Ex e mb IIC T6/T4 Gb
- II 2 G Ex d e mb IIC T6/T4 Gb
- II 2 D Ex tb IIIC T85°C - T135°C Db

#### Specifications

Material	sheet metal with finish
Protection	IP65 / IP66
Mounting plate	optional
Earthing	earthing bolt
Ambiant temperature	-20°C - +50°C
Mounting	fixed connection with EExd box or optional mounting feet

Zone 0	×	Zone 20	×
Zone 1	✓	Zone 21	✓
Zone 2	✓	Zone 22	✓

INERIS03ATEX0006




#### On request

- installation of terminals, control units
- ambient temperature -20°C - +60°C
- mounting plate

#### Ordering data

Code	Dimensions (hwxwd) (mm)	Weight
DE1-WH330	250 x 330 x 230	8 kg
DE1-WH520	330 x 520 x 230	13 kg
DE1-WH670	520 x 670 x 230	22 kg

#### Dimensional sketches

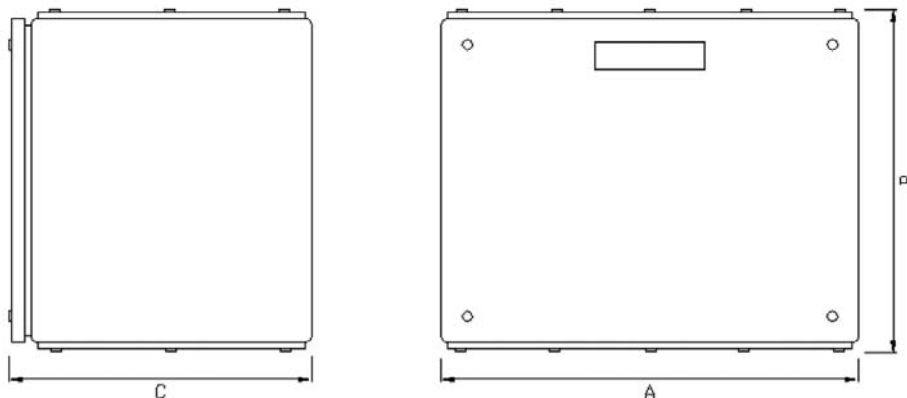

Product code	Dimensions		
	A	B	C
DE1-WH330	330	250	230
DE1-WH520	520	330	230
DE1-WH670	670	520	230