

Plugs are used to safely seal unused openings in enclosures and apparatuses. The plug is screwed in and fastened on the outside.

Specifications


Marking	All plugs are marked with a certificate number and size.
Material	brass nickel plated
Thread	metric x1.5
Protection	IP68
Ambiant temperature	-40°C - +100°C
Guideline	ATEX
Manufacturer	Bimed

Ex II 2 G Ex db / Ex eb IIC Gb

Ex II 2 D Ex tb IIIC Db

Zone 0	✗	Zone 20	✗
Zone 1	✓	Zone 21	✓
Zone 2	✓	Zone 22	✓


CESI13ATEX066X



On request

- stainless steel
- ambient temperature -60°C - +130°C
- NPT thread
- other approvals

Dimensional sketches

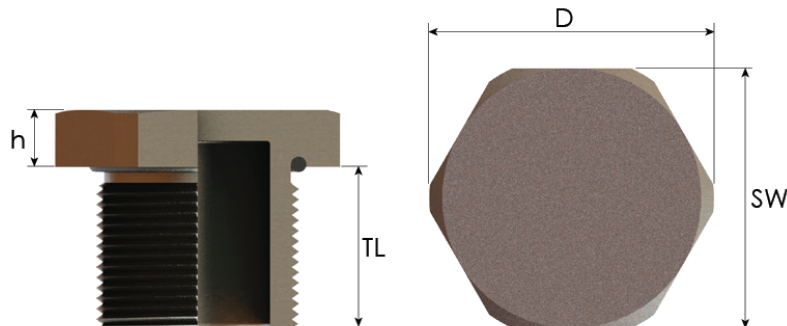

Product code	Dimensions			
	TL	SW	D	h
PNDM1C	15,5	22	24	5,5
PNDM2C	15,5	25	27,5	5,5
PNDM3C	15,5	30	33	5,5
PNDM4C	15,5	37	41	5,5
PNDM5C	17,5	45	50	5,5
PNDM6C	17,5	55	61	5,5
PNDM7C	17,5	70	77	5,5
PNDM8C	20	85	94	5,0
PNDM9C	20	100	111	5,0
PNDM11C	20	120	133,5	5,0