



2000/LED-M/clear/5W

Multi purpose luminare LowTemp IP68, plastic, LED-module 5W, Cover clear



Products may differ in size, colour and appearance to those shown. If you require further information or customisation, please contact us directly.

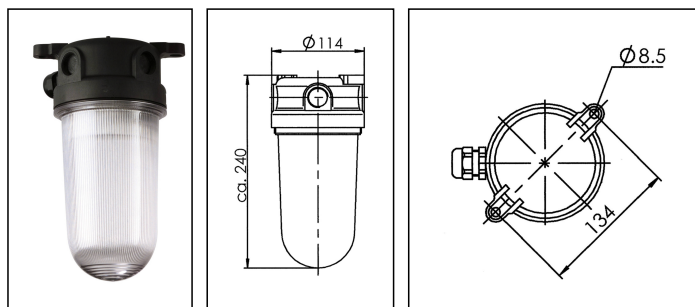

WISKA-Order no.	10110593
Type	2000/LED-M/clear/5W
Material	PBT
Material globe/diffuser	Polycarbonate
Globe colour	Clear
Power[^]	1 x 5 W
Wattage	5 W
Voltage	230 V
Protection class	IP68
Temp. range min	-20 °C
Temp. range max	45 °C
Lampholder	LED-M
Lamp	LED
Lamp	included
Colour temperature	4000 K
Luminous flux	869 lm
Light colour	840 (cool white)
Average lamp durability	55000 h
Material cable gland	Polyamide
Type of cable gland	ESKV 20 PLUS / 7,5-14mm
Using for cable gland	
Ø cable diameter min	7,5 mm
Ø cable diameter max	14 mm
External dimensions LxWxH	134x240mm
Weight	0,66 kg

Your Contact:

WISKA Hoppmann GmbH

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com

Approval	GL
Colour	Black
Mounting	Ceiling, Upside down, Upside, Surface mounting
Equipment	4 threaded knockout entry M20

Remarks:

- Multipurpose fixture made of impact and water resistant plastic
- protection class IP 68 (2 bar – 30 min)
- 2 cable glands M 20 (7,5 – 14mm) enclosed loose
- clear cover
- LED Light sources 5W 230V 840 mounted

Spare parts

SP-1131-2000 ST/LED 230Vac/840	22001154
---------------------------------------	----------

11.12.2019


Your Contact:

WISKA Hoppmann GmbH

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com

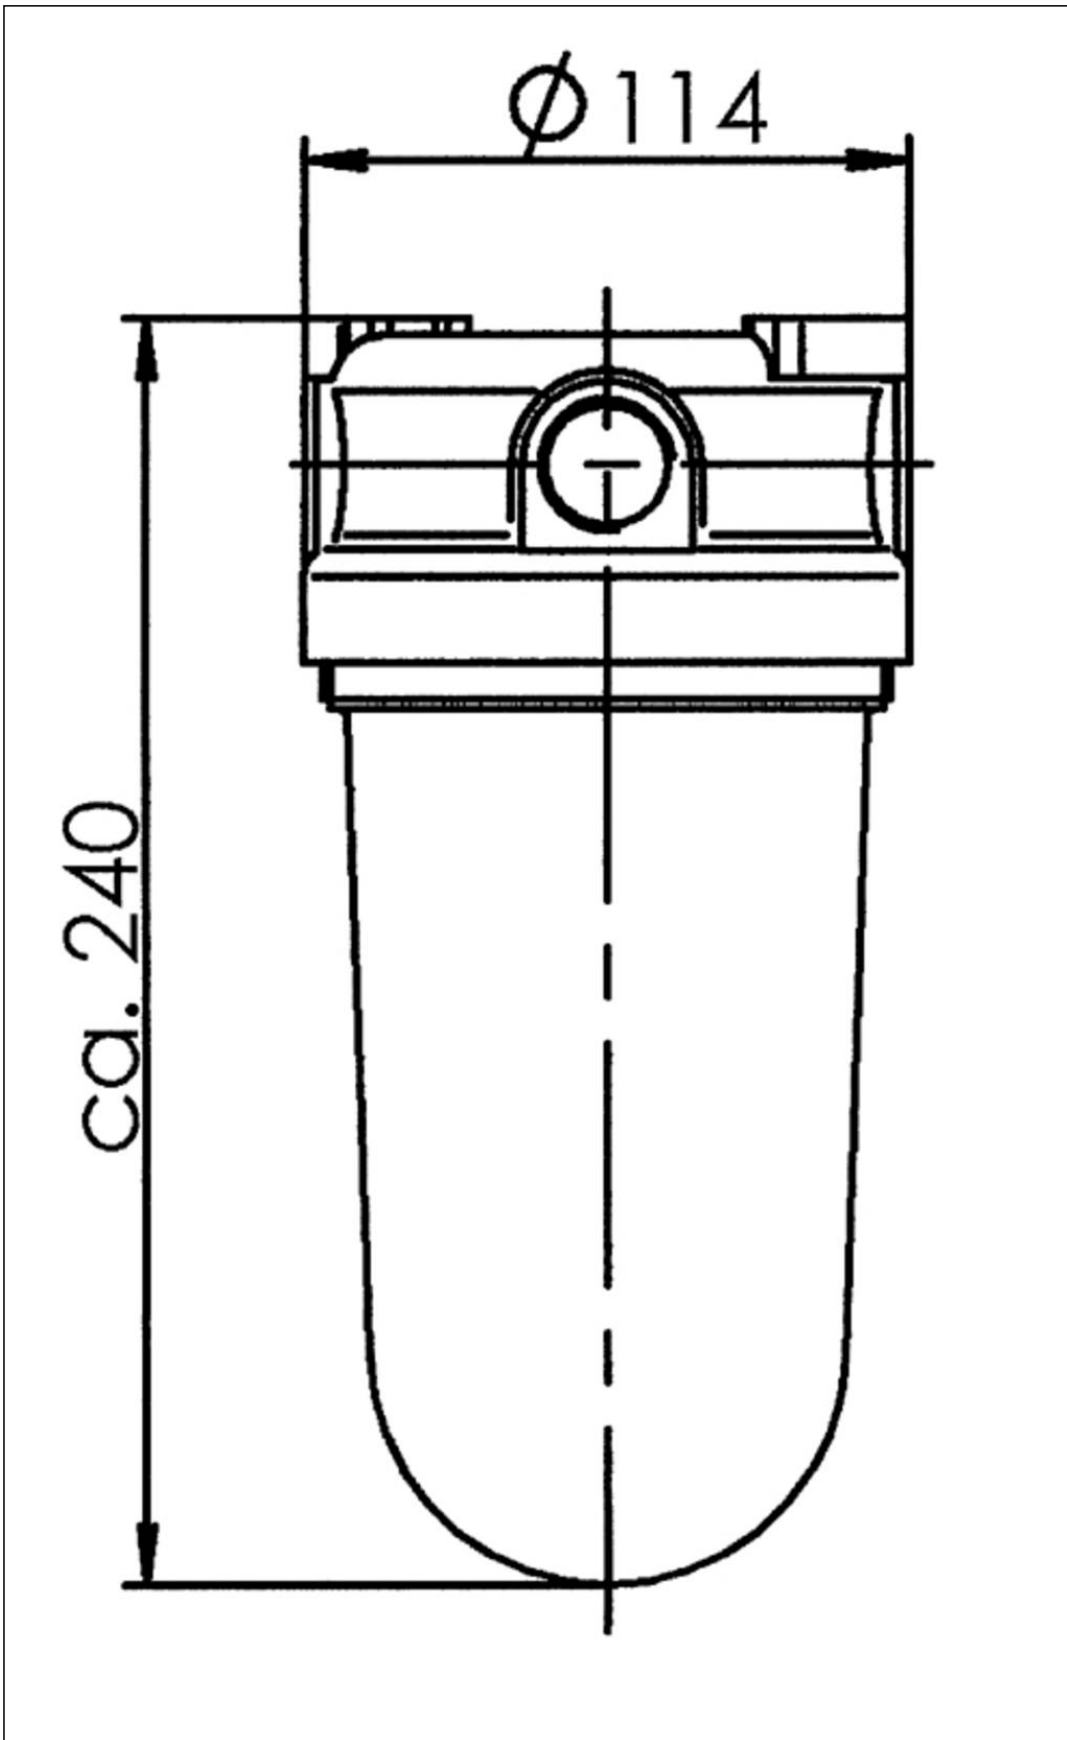


Your Contact:

WISKA Hoppmann GmbH

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com

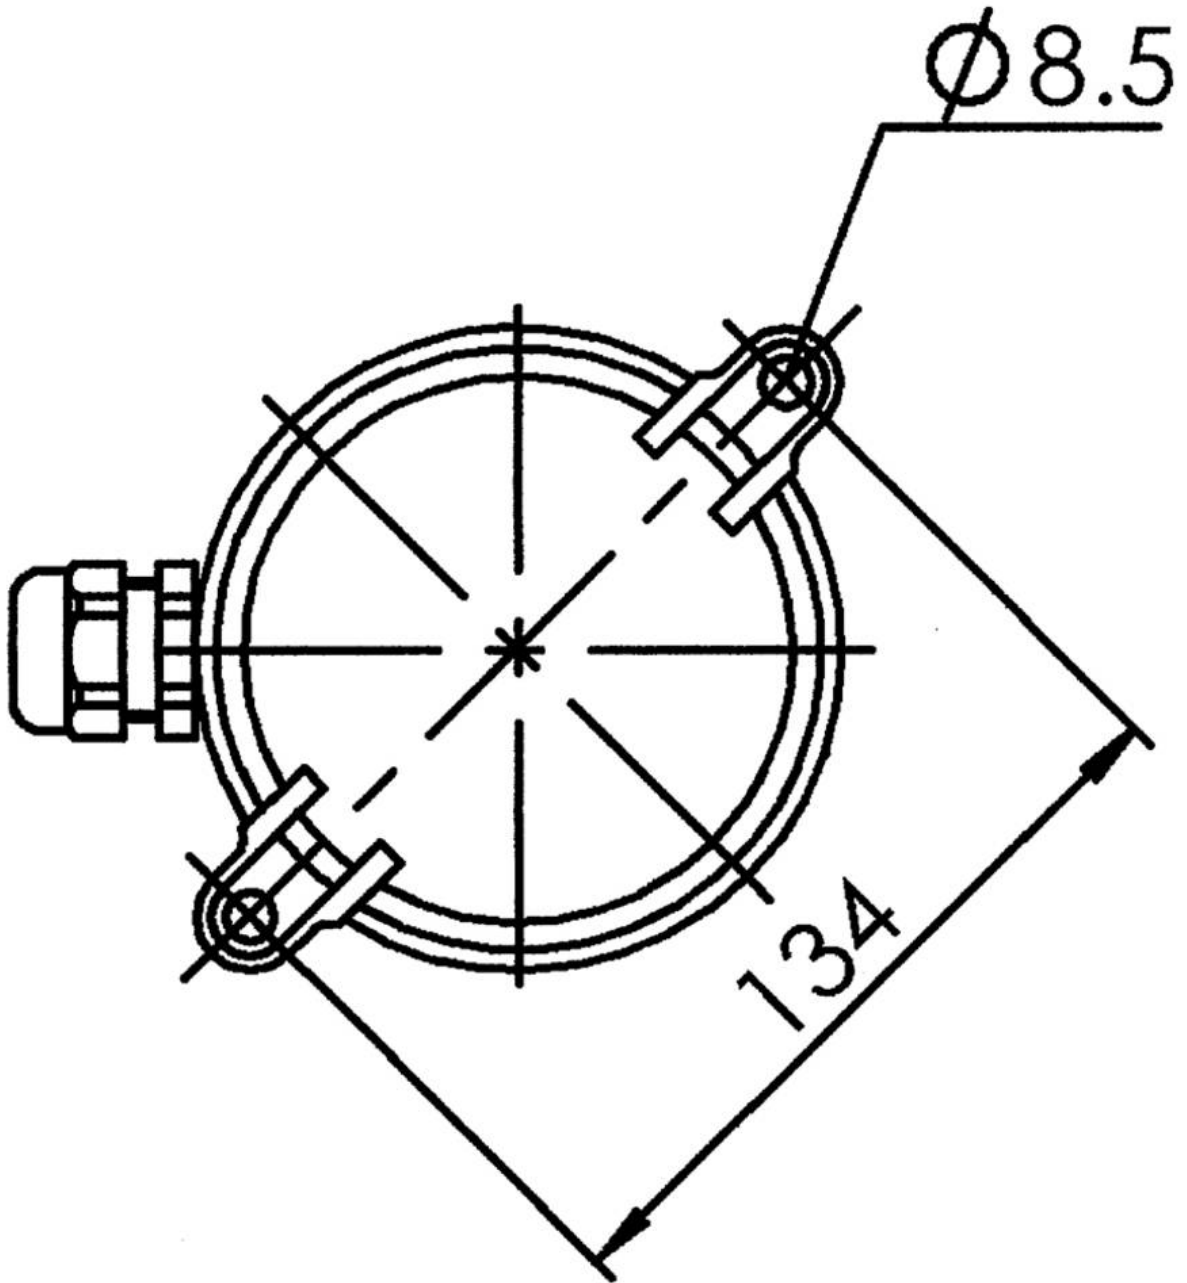

Your Contact:

WISKA Hoppmann GmbH

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com